



Docket No. 1193-4049

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): BELL, et al.

Serial No.: 10/616,852

Filed: July 9, 2003

Group Art Unit: 3653

Confirmation No. 1841

Examiner: TBA

For: FRAUD PREVENTION

CERTIFICATE OF MAILING (37 C.F.R. §1.8(a))

Mail Stop _____
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

I hereby certify that the attached:

1. Claim to Convention Priority Transmittal;
2. Certified Copy of GB 0219259.0;
3. Return Postcard

along with any paper(s) referred to as being attached or enclosed and this Certificate of Mailing are being deposited with the United States Postal Service on date shown below with sufficient postage as first-class mail in an envelope addressed to the: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Respectfully submitted,
MORGAN & FINNEGAN, L.L.P.


Dated: December 2, 2003

By: _____

Helen Tiger
Helen Tiger

Correspondence Address:

MORGAN & FINNEGAN, L.L.P.
345 Park Avenue
New York, NY 10154-0053
(212) 758-4800 Telephone
(212) 751-6849 Facsimile



Docket No.: 1193-4049

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): BELL, et al.

Group Art Unit: 3653

Serial No.: 10/616,852

Confirmation No. 1841

Examiner: TBA

Filed: July 9, 2003

For: FRAUD PREVENTION

CLAIM TO CONVENTION PRIORITY

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

In the matter of the above-identified application and under the provisions of 35 U.S.C. §119 and 37 C.F.R. §1.55, applicant(s) claim(s) the benefit of the following prior application(s):


Application(s) filed in: Great Britain
In the name of: Money Controls Ltd.
Serial No(s): 0218259.0
Filing Date(s): August 6, 2002

- ☒ Pursuant to the Claim to Priority, applicant(s) submit(s) a duly certified copy of said foreign application.
- ☐ A duly certified copy of said foreign application is in the file of application Serial No. _____, filed _____.

Respectfully submitted,
MORGAN & FINNEGAN, L.L.P.

Dated: December 1, 2003

By:

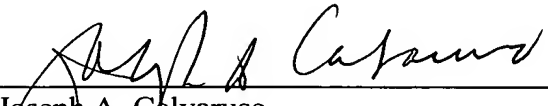

Joseph A. Calvaruso
Registration No. 28,287

Correspondence Address:

MORGAN & FINNEGAN, L.L.P.
345 Park Avenue
New York, NY 10154-0053
(212) 758-4800 Telephone
(212) 751-6849 Facsimile



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed  J. Evans.

Dated 9 July 2003

Request for grant of a patent



1/77

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	07 39866		
2.	Patent application number	0218259.0		06 AUG 2002
3.	Full name, address and post code of the or each applicant	Money Controls Ltd New Coin Street, Royton, Oldham, Lancs. OL2 6JZ.		
	Patents ADP number	8373417001		
	If the applicant is a corporate body, give the country/state of its incorporation			
4.	Title of the invention	Fraud Prevention		
5.	Name of your agent	VENNER, SHIPLEY & CO		
	"Address for service" in the United Kingdom to which all correspondence should be sent	20 LITTLE BRITAIN LONDON EC1A 7DH		
	Patents ADP	1669004 ✓		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and the or each application number	Country	Priority application number	Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application	Number of earlier application	Date of Filing	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'YES' if: a) any applicant in 3. above is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body)	YES		

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 12

Claim(s) 1

Abstract 1

Drawing(s) 6 *see ph*

10. If you are also filing any of the following state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 0

Request for preliminary examination and search (*Patents Form 9/77*) 0

Request for substantive examination (*Patents Form 10/77*) 0

Any other documents 0

11. I/We request the grant of a patent on the basis of this application.

Signature

Stuart Geary

Date

6 August 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

STUART GEARY
020 7600 4212

Fraud Prevention

Description

This invention relates to a method of limiting fraud in connection with coin or note
5 operated machines.

Coin and banknote acceptors are well known. WO-A-0048138 discloses acceptors
which detect fraud attempts and modify their acceptance conditions in dependence
thereon. However, each machine makes its own determination of the presence of
10 fraudsters.

According to the present invention, there is provided an acceptor for money items
or the like, e.g. coins, tokens, bank notes and tickets, comprising sensing means for
sensing parameters of an item submitted to the acceptor, processing means for
15 determining the acceptability of an item submitted to the acceptor in the basis of
the parameters thereof sensed by the sensing means and communication means,
wherein the processing means is configured to respond to a condition indicative of
a fraud attempt by sending an alarm signal using said communication means and to
respond to such an alarm signal, received by said communication means, to modify
20 its acceptance criteria. Said condition may be an actual fraud attempt or a condition
which is suggestive of, but not determinative of, a fraud attempt, for example a
sensed parameter being at the edge of an acceptance range.

Preferably, said condition relates to a sensed parameter value. However, it could be
25 generated by fraud detection means such as means for detecting stringing.

Preferably, said modification comprises reducing an acceptance range for a sensed
item parameter. However, the modification could extend to rejection of all offered
items.

30

The nature of the communication to and from an acceptor according to the present
invention will vary in dependence on circumstances. For instance, in an arcade
environment or an automated ticket office, it is desirable for acceptors to be alerted

to attempted frauds in real time. In such a situation, a data network, employing for example Ethernet, Bluetooth, or 802.11, protocols would be appropriate. However, in the event of the introduction of a new slug or counterfeit bank note, it would be desirable to employ acceptors according to the present invention, even if the alarm
5 signalling were not in real-time but with alarms being transmitted and received during periodic administrative data transfers, e.g. using landline or mobile telephone connections. Furthermore, the alarm may be conveyed in a data storage means, such as the memory of a handheld acceptor administration unit, intended to be taken to acceptors in turn for data transfer, rather than as signals in a network.

10

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings in which:-

Figure 1 illustrates a plurality of gaming machines interconnected by a network;

15

Figure 2 is a schematic block diagram of a coin acceptor in accordance with the invention;

Figure 3 is a schematic block diagram of the circuits of the acceptor shown in Figure 2;

Figure 4 is a distribution curve of coin parameter signals produced by the acceptor of Figure 2;

20

Figure 5 is a schematic flow diagram of processing steps carried out by the microcontroller of the acceptor of Figure 2;

Figure 6 is a schematic flow diagram of further processing steps carried out by the microcontroller of the acceptor of Figure 2 and

25

Figure 7 is a schematic diagram of a banknote acceptor in accordance with the invention.

30

Referring to Figure 1, a plurality of gaming machines 100 are interconnected by an Ethernet network 101. The gaming machines 100 are located in the same establishment.

Overview of coin acceptor

Figure 2 illustrates the general configuration of a coin acceptor used in the gaming machines of Figure 1. The coin acceptor is capable of validating a number of coins

of different denominations, including bimetal coins, for example the new euro coin set and the new UK coin set including the new bimetal £2.00 coin. The acceptor includes a body 1 with a coin run-down path 2 along which coins under test pass edgewise from an inlet 3 through a coin sensing station 4 and then fall towards a gate 5. A test is performed on each coin as it passes through the sensing station 4. If the outcome of the test indicates the presence of a true coin, the gate 5 is opened so that the coin can pass to an accept path 6, but otherwise the gate remains closed and the coin is deflected to a reject path 7. The coin path through the acceptor for a coin 8 is shown schematically by dotted line 9.

The coin sensing station 4 includes four coin sensing coil units S1, S2, S3 and S4 shown in dotted outline, which are energised in order to produce an inductive coupling with the coin. Also, a coil unit PS is provided in the accept path 6, downstream of the gate 5, to act as a credit sensor in order to detect whether a coin that was determined to be acceptable, has in fact passed into the accept path 6.

The coils are energised at different frequencies by a drive and interface circuit 10 shown schematically in Figure 2. Eddy currents are induced in the coin under test by the coil units. The different inductive couplings between the four coils and the coin characterise the coin substantially uniquely. The drive and interface circuit 10 produces corresponding digital coin parameter data signals x_1 , x_2 , x_3 , x_4 , as a function of the different inductive couplings between the coin and the coil units S1, S2, S3 and S4. A corresponding signal is produced for the coil unit PS. The coils S have a small diameter in relation to the diameter of coins under test in order to detect the inductive characteristics of individual chordal regions of the coin.

Improved discrimination can be achieved by making the area A of the coil unit S which faces the coin, such as the coil S1, smaller than 72 mm^2 , which permits the inductive characteristics of individual regions of the coin's face to be sensed.

In order to determine coin authenticity, the coin parameter signals produced by a coin under test are fed to a microcontroller 11 which is coupled to a memory in the form of an EEPROM 12. The microcontroller 11 processes the coin parameter signals x_1 , - x_4 derived from the coin under test and compares the outcome with

corresponding stored values held in the EEPROM 12. The stored values are held in terms of windows having upper and lower value limits. Thus, if the processed data falls within the corresponding windows associated with a true coin of a particular denomination, the coin is indicated to be acceptable, but otherwise is rejected. If acceptable, a signal is provided on line 13 to a drive circuit 14 which operates the gate 5 shown in Figure 1 so as to allow the coin to pass to the accept path 6. Otherwise, the gate 5 is not opened and the coin passes to reject path 7.

The microcontroller 11 compares the processed data with a number of different sets of operating window data appropriate for coins of different denominations so that the coin acceptor can accept or reject more than one coin of a particular currency set. If the coin is accepted, its passage along the accept path 6 is detected by the post acceptance credit sensor coil unit PS, and the unit 10 passes corresponding data to the microcontroller 11, which in turn provides an output on line 15 that indicates the amount of monetary credit attributed to the accepted coin.

The sensor coil units S each include one or more inductor coils connected in an individual oscillatory circuit and the coil drive and interface circuit 10 includes a multiplexer to scan outputs from the coil units sequentially, so as to provide data to the microcontroller 11. Each circuit typically oscillates at a frequency in a range of 50-150 kHz and the circuit components are selected so that each sensor coil S1-S4 has a different natural resonant frequency in order to avoid cross-coupling between them.

As the coin passes the sensor coil unit S1, its impedance is altered by the presence of the coin over a period of ~100 milliseconds. As a result, the amplitude of the oscillations through the coil is modified over the period that the coin passes and also the oscillation frequency is altered. The variation in amplitude and frequency resulting from the modulation produced by the coin is used to produce the coin parameter signals $x_1, - x_4$ representative of characteristics of the coin.

The microcontroller 11 is coupled to a network interface card 23 which interfaces the microcontroller 11 to the network 101.

Processing Circuitry

Figure 3 illustrates a bell shaped distribution curve 20 of the values of one of the parameters, x_1 , produced when a number of coins of the same denomination are passed through the validator. It can be seen that most of the occurrences of the parameter value x_1 occur at a peak value x_p and a generally bell shaped distribution occurs around this peak value. The distribution can be determined by passing a number e.g. 100 coins of the same denomination through the validator and recording the corresponding values of x_1 . The EEPROM 12 stores data corresponding to a window of acceptable values of the parameter x_1 for each denomination of coin to be accepted by the validator. In Figure 3, one of the windows, referred to herein as a normal acceptance window NAW, is shown, extending between upper and lower window limit values w_1, w_2 . The stored data in EEPROM 12 may comprise the upper and lower window limit values w_1, w_2 themselves or may comprise a mean value and a standard deviation, such that the microcontroller 11 can define the window NAW from the stored data as a predetermined number of standard deviations about the mean.

The graph of Figure 3 can also be considered in a different way. For coins of the true denomination that corresponds to the normal acceptance window (NAW), the most likely value of parameter x_1 is the peak value x_p and the least likely value occurs at the upper and lower window limits w_1, w_2 . Whilst it is possible for an acceptable value x_f to occur close to one of the window limits w_2 , the probability distribution shown in Figure 3 makes clear that it is unlikely that many such values x_f will occur for the true coin concerned. If several values x_f occur, this is more likely to indicate the presence of a fraudulent distribution as shown in dotted outline, with a peak value centred on or around x_f . This property is used in accordance with the invention to discriminate between true coins and a set of frauds that have been manufactured to the same design which produce coin parameter values x_f lying within the normal acceptance window NAW. In accordance with the invention, the occurrence of more than parameter value x_f is considered to be unusual and likely to represent the occurrence of a fraud. In accordance with the

invention, a restricted access window RAW shown in Figure 3 is used upon detection of such a situation, as will now be described.

As shown in Figure 3, upper and lower safety margins LSM, USM are defined in regions of relatively low probability of an occurrence of a parameter value corresponding to a true coin. It will be understood from the distribution curve 20 that it is much more likely for an occurrence of parameter signal x_1 to occur between the area of relatively high probability between dotted lines 22, 23 than in the lower and upper safety margins LSM, USM, where there is a relatively low probability of occurrence of a true value. In accordance with the invention, when the microcontroller 11 shown in Figure 2 detects the presence of a value x_f in either the LSM or USM, it then changes from the normal acceptance window NAW to a restricted acceptance window RAW based on data stored in EEPROM 12, which is narrower than the normal acceptance window, as shown in Figure 3. In practice, the RAW may correspond to the region of high probability between the dotted lines 22, 23 although different values can be used, which are non-contiguous with the LSM and USM. If the next, subsequent occurrence of the parameter signal x_1 produced by the next coin under test, occurs in e.g. the USM, close to the previous value x_f , the next coin will be rejected because it lies outside of the restricted access window RAW and is more likely to indicate the presence of a fraudulent coin forming part of the fraudulent coin distribution 21 than the true coin forming part of the distribution 20.

When a first coin under test exhibits a parameter signal x_f within either the upper or lower safety margin, USM, LSM of the normal acceptance window NAW, the coin is accepted as a true coin (assuming that its other detected parameters are satisfactory) but the acceptor then switches to a restricted access window RAW for subsequent coins and broadcasts this to the other machines 100 on the network 101. The occurrence of the first coin with parameter value x_f sets a flag which may comprise a counter in the microcontroller 11. The acceptor continues to use the restricted access window for a predetermined number of coins set by the counter, and the flag remains set until a number of coins with parameter signals x_1 lying within the restricted window RAW occur in succession. The number is dependent upon the

distribution of coin data and the probability of a true coin legitimately falling at the limits of the distribution 20. This will vary from coin to coin but typically might be six or eight insertions of coin or could be as few as one or as many as twenty.

- 5 If another coin produces a value x_1 outside of the restricted access window prior to expiry of the count, the flag is reset and the count begins again.

Additionally, an upper security barrier USB and a lower security barrier LSB are disposed above and below the upper and lower window limits w_1 , w_2 respectively.

- 10 If a coin produces a parameter signal x_1 lying within either the upper or lower security barrier regions USB, LSB, the previously described process is carried out and the acceptor switches from the normal acceptance window NAW to the restricted access window RAW. This process is carried out in order to reject potentially fraudulent coins that form part of a distribution such as the fraudulent
- 15 distribution 21. For example, it may be possible to find a coin of a foreign denomination which has a close, similar distribution to the true distribution 20, the foreign coin having a distribution 21. The fraudster may attempt to defraud the validator by feeding a series of the foreign coins of the same denomination through the acceptor. With the described arrangement according to the invention, the first
- 20 foreign coin would be rejected if its parameter signal fell within USB because it is outside of the normal acceptance range NAW, and would cause the system to switch to the RAW to reject subsequent coins of the fraudulent coin distribution. If the first fraudulent coin's parameter signal fell within USB, it would be accepted and again would cause the system to switch from NAW to RAW for subsequent coins.
- 25 Since for most of the fraudulent foreign coins, their parameter signal is more likely to be in USB than other parts of the distribution 21, there is a high probability that the first fraudulent coin will be rejected.

- The acceptor may also include a timer which, after the restricted access window
- 30 RAW has been adopted, returns the acceptor back to the normal acceptance window NAW after a given time period. The fraudster may insert a fraudulent coin, get it accepted by the coin acceptor which then switches to use of the restricted access window RAW. If the fraudster then gives up after a few more tries, and goes away,

the timer can then time-out in time for an honest user to come and use the acceptor on the basis of the normal acceptance window.

The routine followed by the microcontroller 11 is shown in more detail in Figure 4.

5 At step S0, the system is initialised. The aforementioned counter is set so that its operating parameter n is initialised i.e. $n = 0$. Also, the aforementioned timer has an operating parameter t which can vary from t_{\max} to zero, which indicates a timed-out condition at step S0 t is initialised i.e. $t = 0$.

10 At step S1, successive values of the parameter signal $x_{11}, x_{12}, \dots, x_{1N}$ are shown. These occurrences of the parameter signal are produced in response to the acceptor testing successive coins one after the other. The successive occurrences of the parameter signal are tested one after the other by the remainder of the routine as will now be explained.

15 Considering the first occurrence of the parameter signal x_{11} , produced in response to a first coin, at step S2, a test is carried out to see if the timer is active. If it is not active, $t = 0$. This means that a sufficiently long period of time has elapsed since the acceptor was last used, indicating that it is safe to use the relatively wide, normal
20 acceptance window NAW.

At step S3, the status of the flag counter is checked. If the flag parameter $n = 0$, this means that the flag is not set and that it is safe to use the normal acceptance window NAW. However, if the flag counter is set whilst the timer is running, it is
25 not safe to use the normal acceptance window because the conditions indicate that a coin, previously accepted by the acceptor 1 or the acceptor of one of the other machines 100, has triggered the flag counter of an acceptor whilst its timer is running. As a result, the value of x_{11} needs to be compared with the restricted access window RAW. This is carried out at step S4. If the value of x_{11} falls within
30 the restricted access window RAW, the coin is accepted at step S5 but otherwise is rejected at step S6.

As previously mentioned, if the timer or the counter flag are set to 0, it is safe to use the normal acceptance window NAW. This test is carried out at step S7 and the coin is either accepted or rejected at step S5 or S6.

5 In addition to comparing the parameter value against either of the acceptance windows, each occurrence of the parameter value is compared with the upper and lower safety margins and safety barriers. These tests are performed at steps S8 and S9. If the parameter value signal $x_{1,1}$ falls within any of the barriers or margins USB, USM, LSB, LSM, this indicates that the aforementioned flag needs to be set and that
10 the timer t should be set running and an alert must be broadcast to the other machines 100. These activities are carried out at steps S10, at which the count parameter n is set to a predetermined maximum value n_{max} , and S11 at which the alert is broadcast. It will be understood that n_{max} and an integer number corresponding to the successive number of coins which subsequently need to be
15 found to be true when using the relatively narrow restricted access window RAW. The value of the timer interval t is set to t_{max} which corresponds to the period of time for which the timer will run until reaching a value $t = 0$. This, therefore sets the time after which the acceptor will recover and switch back to use the normal acceptance window NAW after a period of using the restricted access window RAW
20 (step S2).

If the value of the parameter signal $x_{1,1}$ does not fall within any of the margins or barriers tested by step S8, S9, this indicates that the parameter signal $x_{1,1}$, on the assumption that the coin has been accepted, falls within the restricted access
25 window RAW. In this situation, the counter parameter n needs to be decremented, if it is not already zero. This occurs at step S12.

Considering the situation where the first occurrence of the coin parameter signal $x_{1,1}$ falls within the upper safety margin USM. In this situation, $t = 0$ and $n = 0$ so that
30 the routine passes to step S7 at which the value is compared with the normal acceptance window NAW. The value of $x_{1,1}$ falls within the window and hence the coin is accepted at step S5.

Additionally, the value of $x_{1,1}$ is found to be within the upper safety margin USM, at step S9. As a result, the flag counter parameter n is set to n_{\max} and the timer parameter t is set to t_{\max} at step S10.

5 When a second coin is entered a second occurrence of the coin parameter signal x_1 is produced, namely $x_{1,2}$. At step S2, the timer is now set to $t \neq 0$ and so the process moves to step S3. The parameter $n \neq 0$ and so the value of $x_{1,2}$ is compared with the restricted access window RAW at step S4. The value is either accepted or rejected. Assuming it is accepted, and falls outside of the margins and barriers
10 tested at step S8 and S9, the counter parameter n is decremented at step S11. The timer t is running all the time towards zero.

The process continues with the subsequent occurrences of the parameter x_1 until the timer $t = 0$ or the counter flag $n = 0$. The acceptor then reverts to the use of
15 the normal acceptance window NAW.

Referring to Figure 6, when an acceptor 1 receives a broadcast alert from another machine 100 (S21), it sets its timer running and sets its count flag to n_{\max} and timer to t_{\max} (S22).

20 The previously described process thus relates to one of the coin parameter signals x_1 . However, as previously explained, four different coin parameter signals $x_1 - x_4$ are produced in this example and in fact, in practice, up to fourteen different individual parameter signals may be processed. The routine performed according to
25 Figure 4 may be carried out for each individual coin parameter signal with each having its own normal access window and restricted access window, controlled as previously described, with each parameter signal being processed independently of the others. Alternatively, to simplify the processing, the occurrence of one parameter signal falling within its respective USB, LSB, LSM or USM may trigger
30 the use of an individual restricted access window for all of the coin parameter signals concurrently.

Other modifications are possible. In the routine shown in Figure 3, the counter flag is clocked downwardly from a first predetermined number n_{\max} . Typically n_{\max} is in a range of 6 to 20 inclusive. Whilst $n \neq 0$ the restricted access window RAW is used (step S3). However, when $n=0$ i.e. when 6 to 20 true coins have been detected, the
5 normal window NAW is used. The occurrence of a single fraudulent coin will then re-trigger the use of the RAW (steps S8 – S10). However, if desired a different pre-selected number p of occurrences of fraudulent coin could be used to re-set $n = n_{\max}$ and thereby re-trigger the use of the RAW. The pre-selected number p of occurrences of fraudulent coin is selected to be less than the predetermined number
10 n to thereby improve the sensitivity of the system. Preferably the number p is 1 as described with reference to Figure 4 to maximise the sensitivity to fraudulent coins, although a larger value of p may in some instances be desirable to provide system damping.

15 In another modification, the routine may switch from the normal acceptance window NAW to the RAW in response to a coin parameter signal falling within a very narrow portion of the NAW itself, which may signify a fraudulent coin in certain circumstances.

20 *Banknote acceptor*

The previously described routines are also applicable to banknote acceptors and an example is shown in Figure 7. A banknote 30 to be tested is inserted between driven rollers 31, 32 so as to pass over a sensing platen 33 over which a series of banknote sensors are disposed. In this example, four sensors S1, S2, S3 and S4 are
25 shown schematically. The sensors may include optical sensors for sensing the length, width or thickness of the banknote, sensors for detecting reflected light from the banknote in order to analyse the spectral response. Alternatively, the light may be sensed in transmission through the banknote. One or more individual predetermined parts of the banknote may be measured. Also, the presence of
30 magnetic printing ink may be detected as described in US-A-4 864 238. The sensors S1-S4 are driven and processed by drive and interface circuitry 10 to produce individual parameter signals x_1, x_2, x_3, x_4 . These parameter signals are similar to the corresponding signals described with reference to Figures 2 and 3 for the coin

acceptor although indicative of different parameters relating to a banknote. The resulting signals thus can be processed according to the previously described routine. The parameter signals are passed to a microcontroller 11 connected to an EEPROM 12 that contains stored window values. The parameter signals are
5 compared with stored windows corresponding to acceptable banknotes in the manner previously described with reference to Figure 4 and upon detection of an acceptable banknote, an output is provided on line 13 to a gate driver 14 which operates a gate 34. If the banknote is found to be acceptable, it is passed to a store 35 but otherwise is fed into a reject path 36 and passes out of the acceptor.

10

Thus, in accordance with the invention, the banknote acceptor is provided with increased security to discriminate against a fraudster inserting a series of fraudulent banknotes all made according to the same design, which individually would fall within the normal acceptance window for an acceptable denomination of banknote.

15

Whilst the invention has been described by way of example in relation to a coin acceptor and a bank note acceptor it will be understood that it is applicable to other money items such as tokens which are sometimes used instead of coins and other sheet members which have an attributable money value including, but not limited
20 to, credit and debit cards.

Claims

1. An acceptor for money items or the like comprising sensing means for sensing parameters of an item submitted to the acceptor, processing means for
5 determining the acceptability of an item submitted to the acceptor in the basis of the parameters thereof sensed by the sensing means and communication means, wherein the processing means is configured to respond to a condition indicative of a fraud attempt by sending an alarm signal using said communication means and to respond to such an alarm signal, received by said communication means, to modify
10 its acceptance criteria.
2. An acceptor according to claim 1, wherein said condition relates to a sensed parameter value.
- 15 3. An acceptor according to claim 2, wherein said condition comprises a sensed parameter falling within a marginal region of an acceptance range therefor.
4. An acceptor according to claim 1, 2 or 3, wherein said modification comprises reducing an acceptance range for a sensed money item parameter.
20
5. An acceptor according to any preceding claim, wherein the communication means comprises data network communication means.
6. A coin- or banknote-operated machine including an acceptor according to
25 any preceding claim.
7. A system comprising a plurality of coin- or banknote-operated machines, each including an acceptor according to claim 5 and interconnected in a data network.
30

Abstract

Money Item Acceptor

An acceptor for money items such as coins or banknotes produces a money item
5 parameter signal x_1 as a function of a sensed characteristic of a money item. A store
(12) provides data which defines a window corresponding to a normal acceptance
range of values of the parameter signal for a money item of a particular
denomination (NAW), the range including relatively high and low acceptance
probability regions (RAW, USM) which correspond to a relatively high or low
10 probability or an occurrence of a sensed money item of a particular denomination.
The processor 11 determines when an occurrence of the parameter signal x_1 falls
within the low probability region (USM) and then for the next sensed money item
compares the value of the parameter signal (x_1) with window data corresponding to
a restricted acceptance range (RAW) so as only to accept the second money item if
15 the corresponding value of the parameter signal x_1 falls within the restricted
acceptance range.

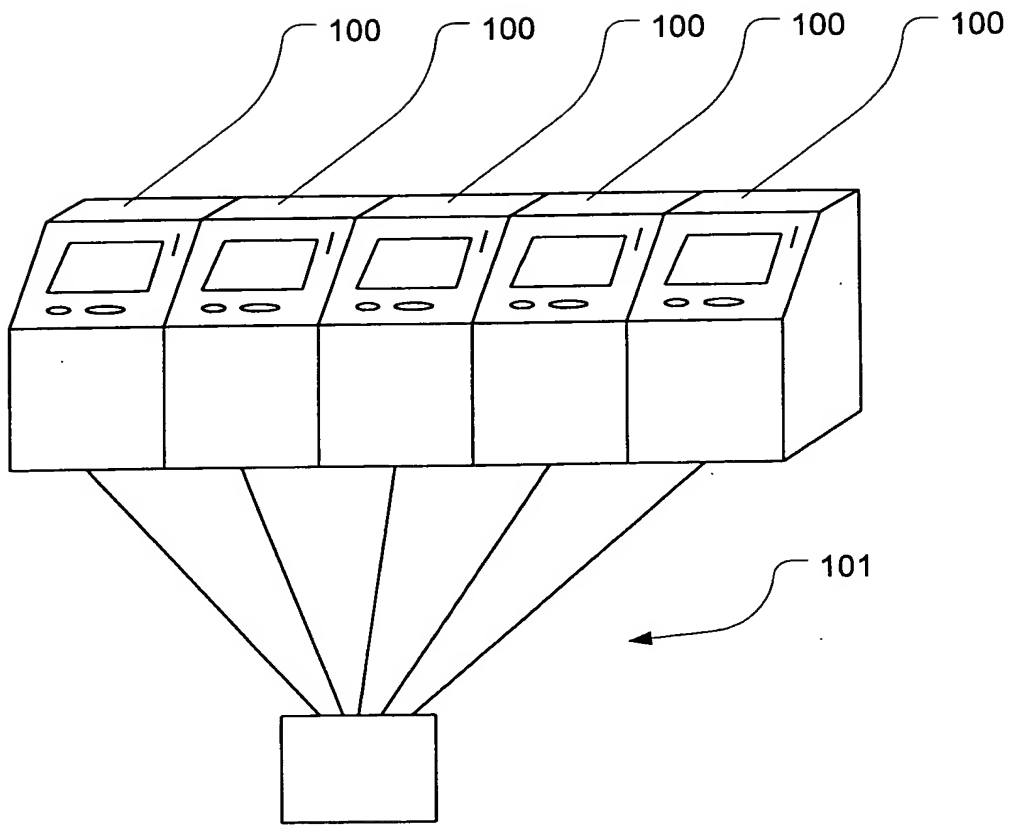


Figure 1

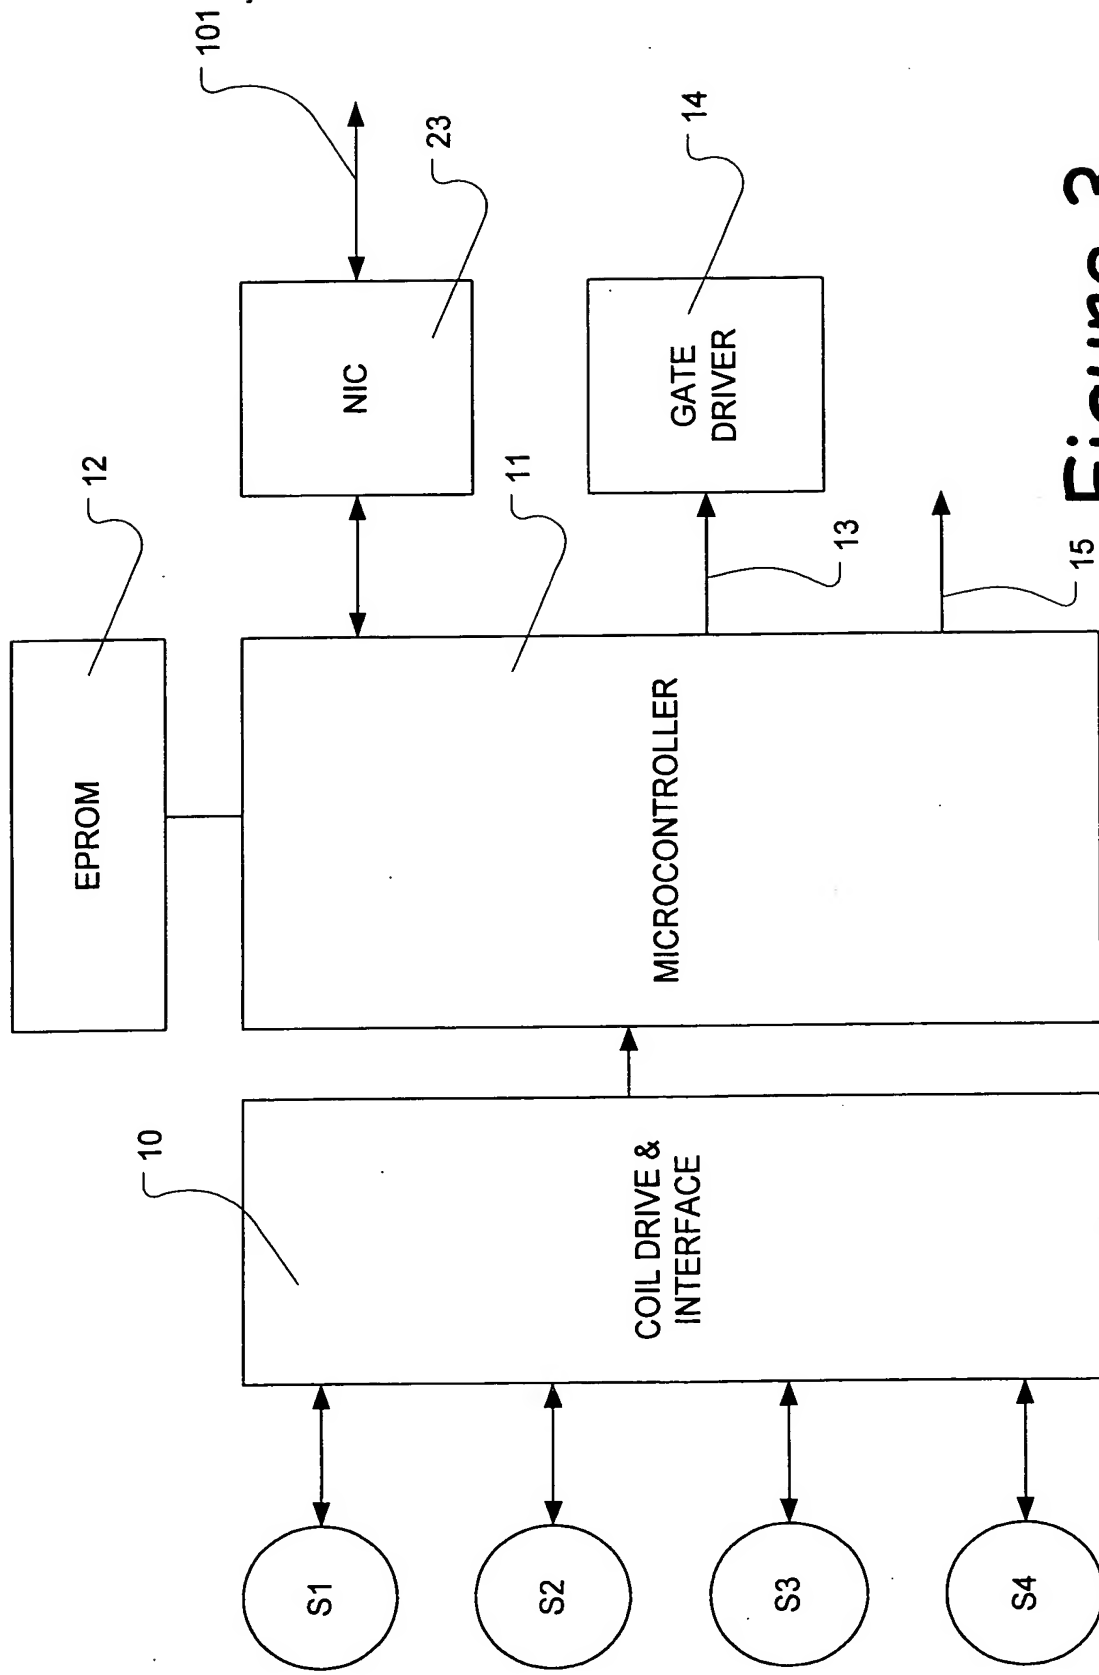


Figure 3

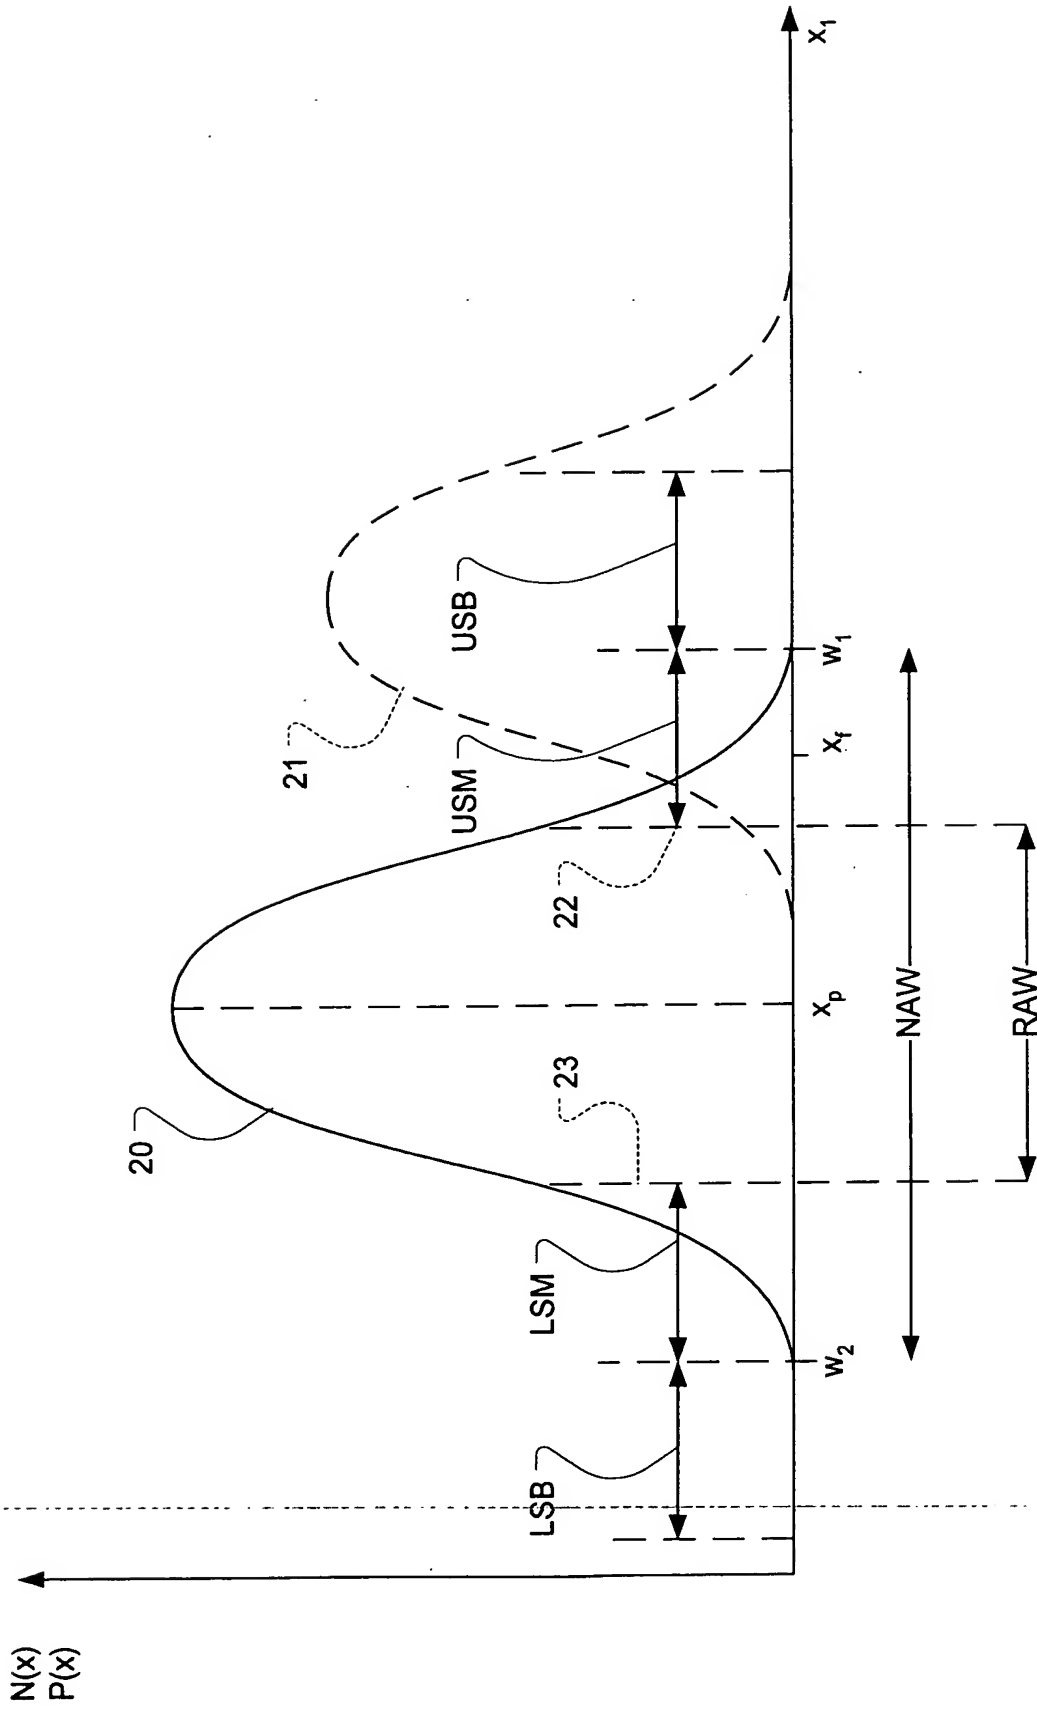


Figure 4

Figure 5

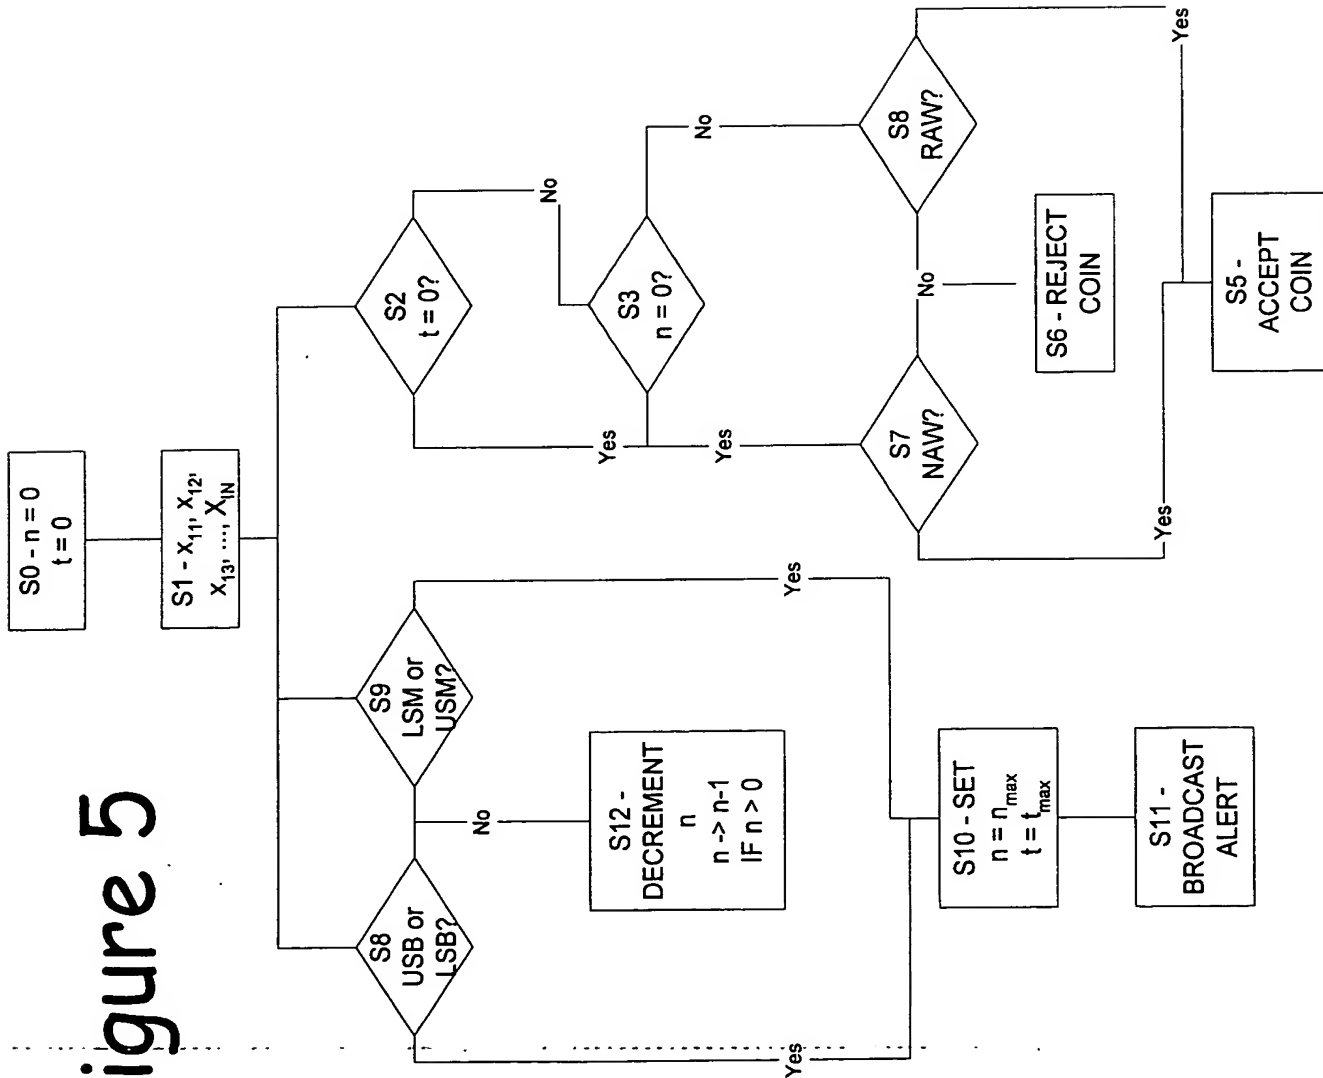
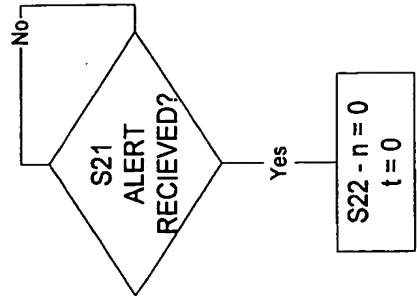


Figure 6



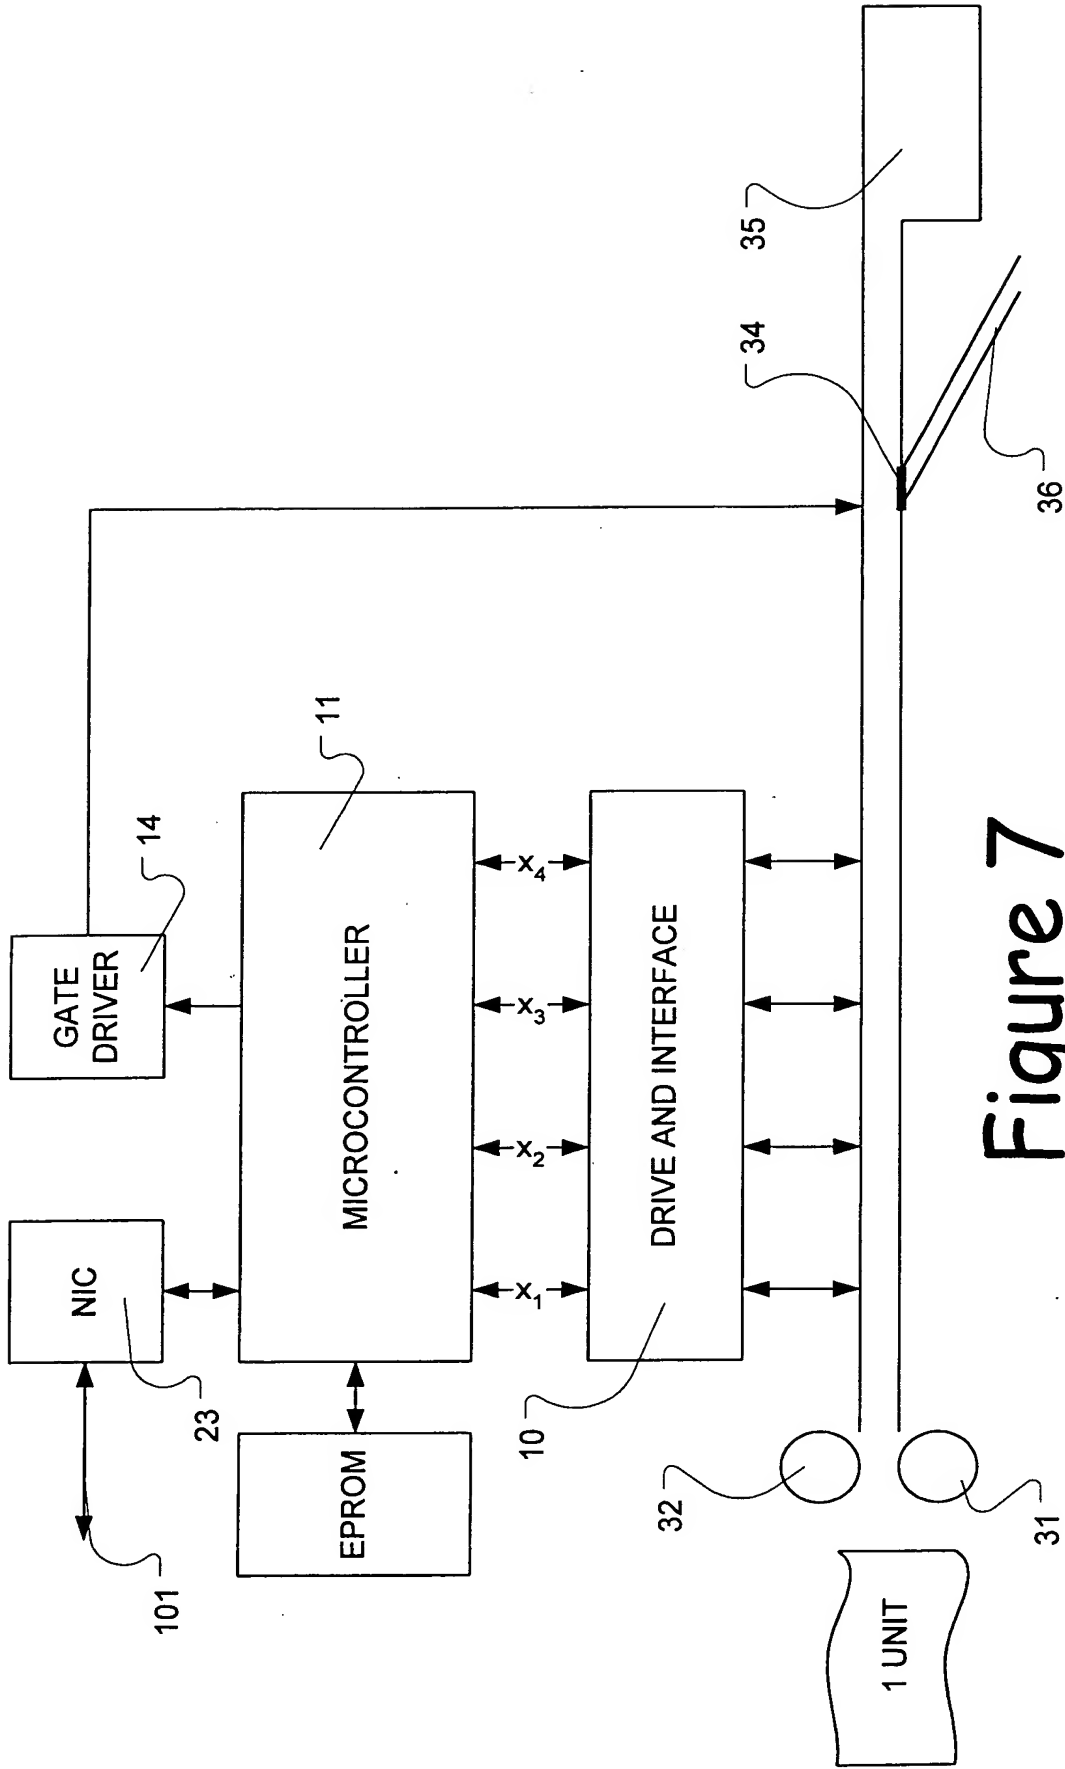


Figure 7